



GSM/UMTS ANTENNA

Antenna UMTS/GSM
Adhesive U25, 2.5 dBi,
SMA(m), RG174/3m

AO-AUMTS-S2S

SECTRON company offers a wide portfolio of GSM/UMTS antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.



BENEFITS


- Low VSWR
- Easy installation
- Omnidirectional - suitable for moving devices

FEATURES

AO-AUMTS-S2S

Technology	GSM/UMTS
Frequency bands	800/1900/2100 MHz
Bandwidth	-
Gain	2.5 dBi
VSWR	<1.8:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	108 x 30 x 7.7 mm
Weight	47.38 g
Operating temperature	-30 to +80 °C
Execution	External
Method of attachment	Adhesive
Cable type	RG174/U
The cable length	3 m
Connector type	SMA(m)

DRAWING

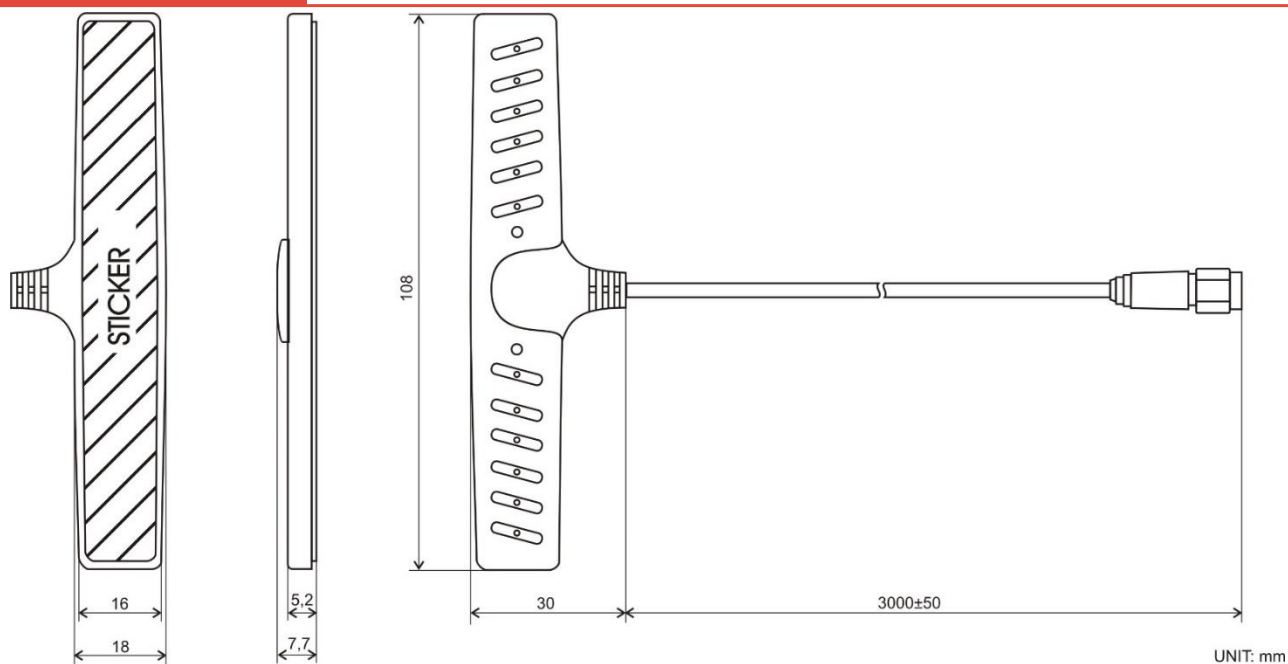

CONTACTS