

GSM/UMTS ANTENNA

Antenna GSM/UMTS flexible hexa-band, U.FL 350mm

AO-AG-FPC14U350

SECTRON company offers wide portfolio of GSM/UMTS antennas with various versions differing in shape, level of gain or attachment manner. SECTRON guarantees a compatible connection between antenna and all antenna adaptors produced by SECTRON.


BENEFITS

- Low VSWR
- Easy installation
- Minimalist dimensions
- Flexible




Technology	GSM/UMTS/LTE
Frequency bands	850/900/1700/1800/1900/2100 MHz
Bandwidth	-
Gain	2 dBi
VSWR	<2.0: 1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10W
Power voltage	-
Dimensions	20 x 70 x 0.1 mm
Weight	2.81 g
Operating temperature	-20 to +80 ° C
Execution	Internal
Method of attachment	Adhesive
Cable type	Hirose 088
The cable length	350 mm
Connector type	U.FL

DRAWING

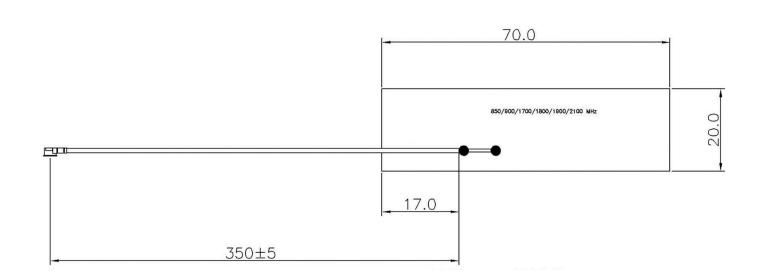


SIMULATED GRAFS AO-AG-FPC14U350


Far-field amplitude 900 MHz -E.nsi

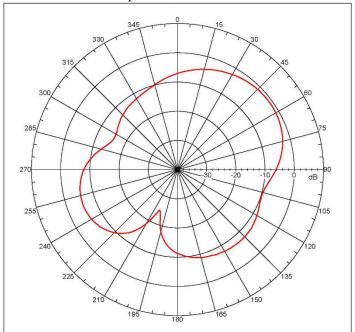


Far-field amplitude 900 MHz -H.nsi

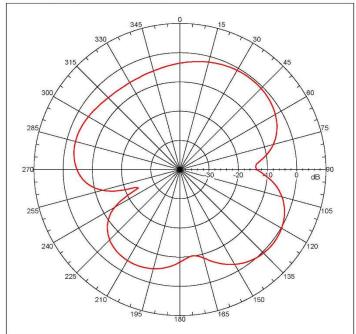

Far-field amplitude 1 800 MHz-E.nsi

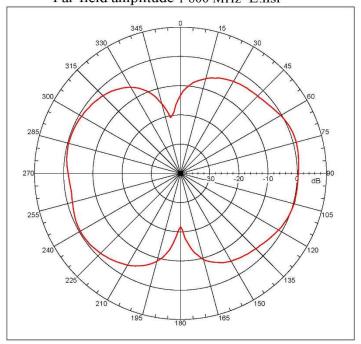


Far-field amplitude 1 800 MHz-H.nsi

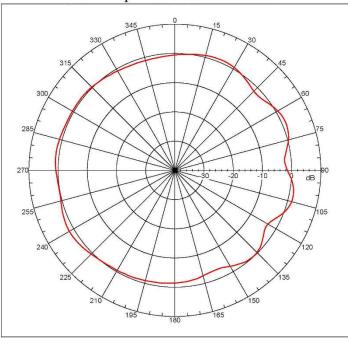


SIMULATED GRAFS AO-AG-FPC14U350

Far-field amplitude 2 100 MHz -E.nsi

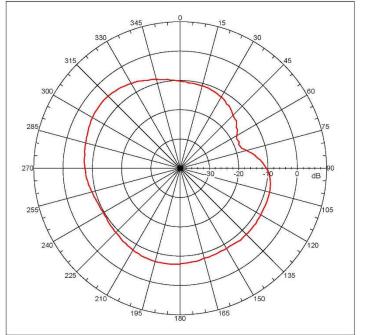

Far-field amplitude 2 100 MHz-H.nsi

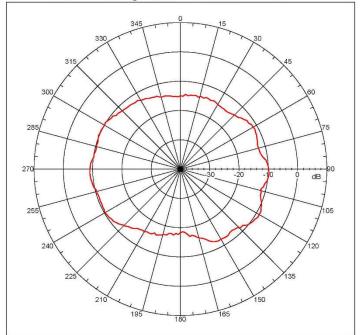

ALL VARIANTS AO-AG-FPC14U350

Different connector variants or cable lengths are available on request.

CONTACTS