

Image: Constant of the second seco

GSM ANTENNA

Antenna GSM Mounting, 5 dBi, MMCX(m), RG174/5m

Rout

AO-AGSM-MI7C

SECTRON company offers a wide portfolio of GSM antennas with various versions differing in shape, level of gain or attachment manner. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.


BENEFITS

- Low VSWR
- Useful for IoT technologies
- Narrow frequency band



Technology	GSM
Frequency bands	806/960 MHz
Bandwidth	-
Gain	5 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Vertical
Maximum input power	10 W
Power voltage	-
Dimensions	451 x 33 mm
Weight	135.66 g
Operating temperature	-30 to +80 °C
Execution	External
Method of attachment	Mounting
Cable type	RG174/U
The cable length	5 m
Connector type	MMCX(m)

DRAWING

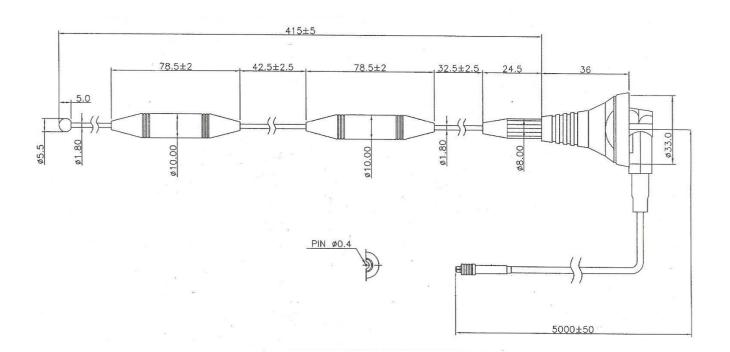

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12 709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ Tel.: +420 556 621 021