



GSM/UMTS/LTE & GNSS ANTENNA

Antenna GSM/UMTS/LTE/GPS/GLONASS Adhesive R40,
2x RG174/10cm/SMA(m), 2x Cable Extension SMA f/m .195/10m

AO-AKOM-40SS10


SECTRON company offers a wide portfolio of GSM/GPS/GLONASS antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.



BENEFITS

- Compact design
- Environmental resistance
- Easy installation

Technology	GSM/UMTS/LTE/GPS/GLONASS
Frequency bands	800/900/1700/1800/2100/2700/1575.42/1602 MHz
Bandwidth	-
Gain	0 dBi
LNA Gain	27 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	Ø71 x 12 mm
Weight	640.5 g
Operating temperature	-20 to +60 °C
Execution	External
Method of attachment	Adhesive
Cable type	2x RG174/U
The cable length	0.1 m
Connector type	SMA(m)
Extended cable type	2x .195
Extended cable length	10 m
Extended connector type	SMA(f)/SMA(m)
Certification	ISO 9001/ISO 14001

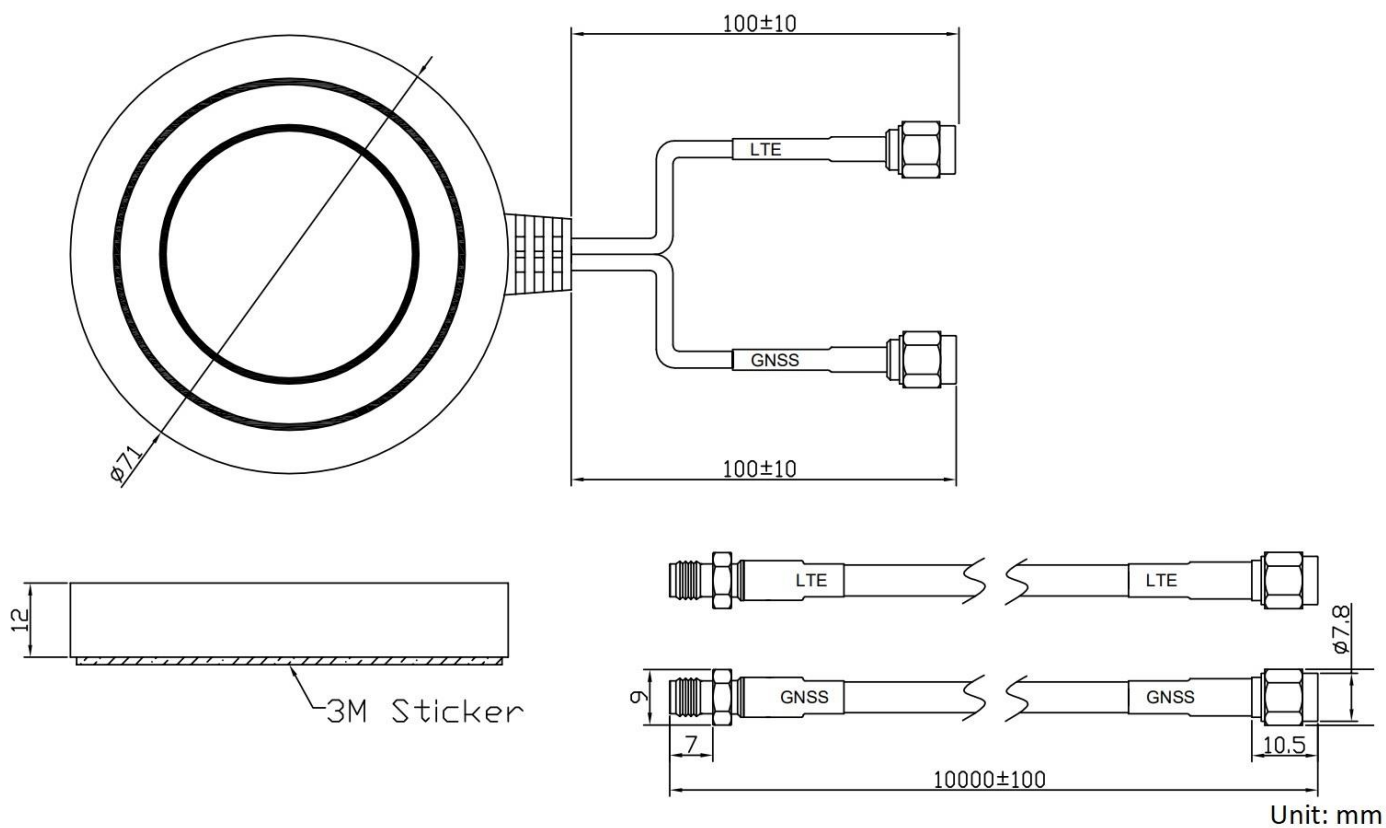

VARIANTS

Different connector variants or cable lengths are available on request.

CONTACTS