




LTE ANTENNA

Antenna LTE Flexible 139,
2 dBi, IPEX MHF, 1.13mm/10cm

AO-ALTE-FPCG139I100

SECTRON company offers a wide portfolio of LTE antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.

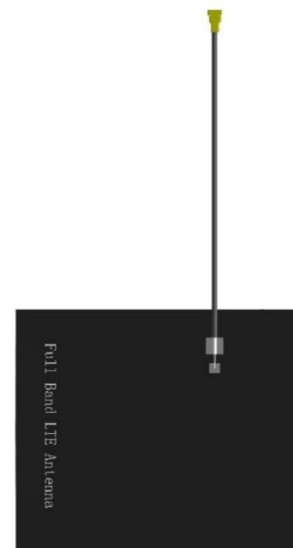


BENEFITS

- Flexible
- Minimalists dimensions
- High frequency range

Technology	GSM/UMTS/LTE
Frequency bands	700/800/900/1700/1800/1900/2100/2400/2500/2600 MHz
Bandwidth	-
Gain	2 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	67.4 x 58.4 x 0.2 mm
Weight	
Operating temperature	-40 to +85 °C
Execution	External
Method of attachment	Adhesive
Cable type	Hirose 068
The cable length	10 cm
Connector type	MHF(IPEX)

DRAWING

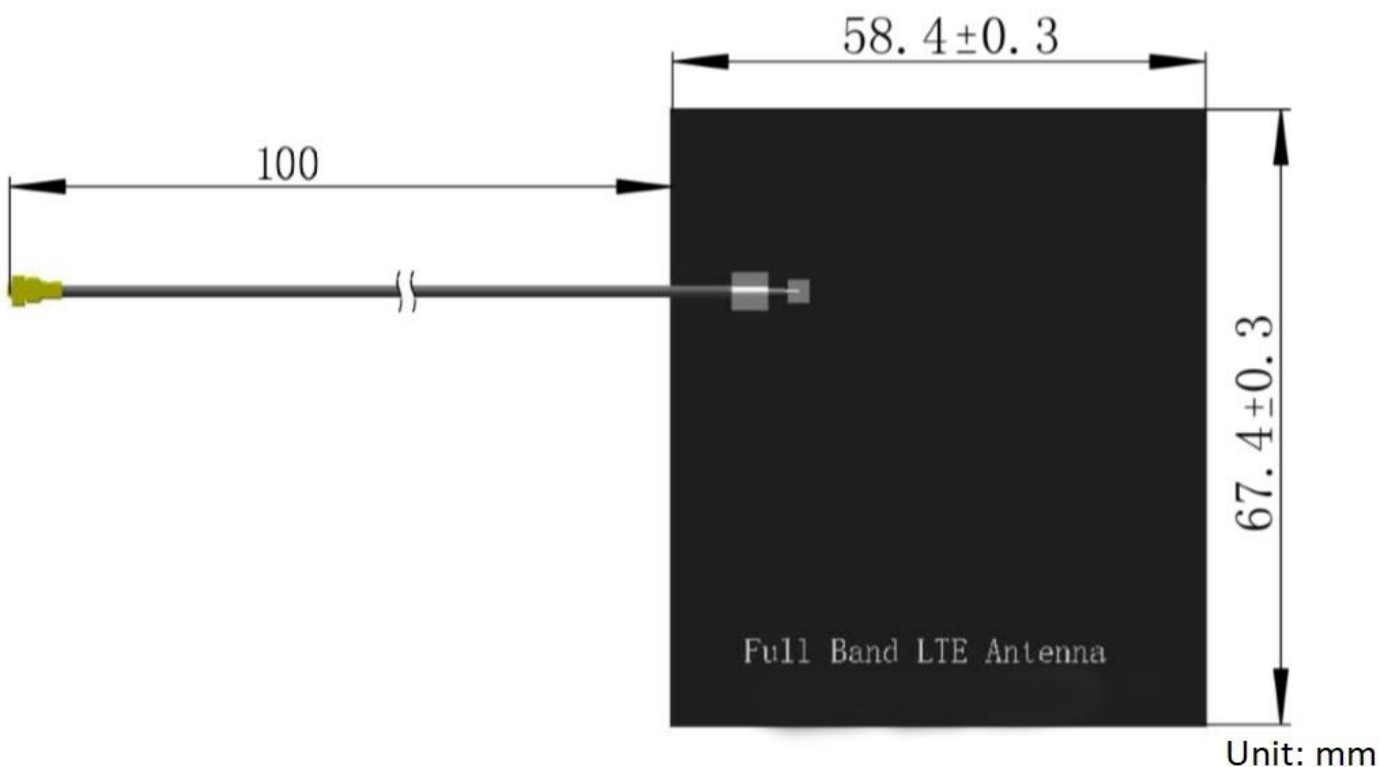

Different connector variants or cable lengths are available on request.