




LTE ANTENNA

Antenna LTE Flexible 139,
2 dBi, IPEX MHF, 1.13mm/10cm

AO-ALTE-G139I100

SECTRON company offers a wide portfolio of LTE antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.

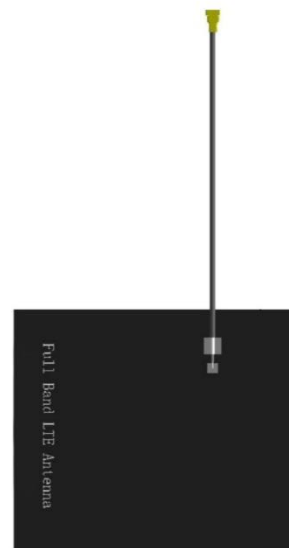


BENEFITS

- Flexible
- Minimalists dimensions
- High frequency range

Technology	GSM/UMTS/LTE
Frequency bands	700/800/900/1700/1800/1900/2100/2400/2500/2600 MHz
Bandwidth	-
Gain	2 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	67.4 x 58.4 x 0.2 mm
Weight	
Operating temperature	-40 to +85 °C
Execution	External
Method of attachment	Adhesive
Cable type	Hirose 068
The cable length	10 cm
Connector type	MHF(IPEX)

DRAWING

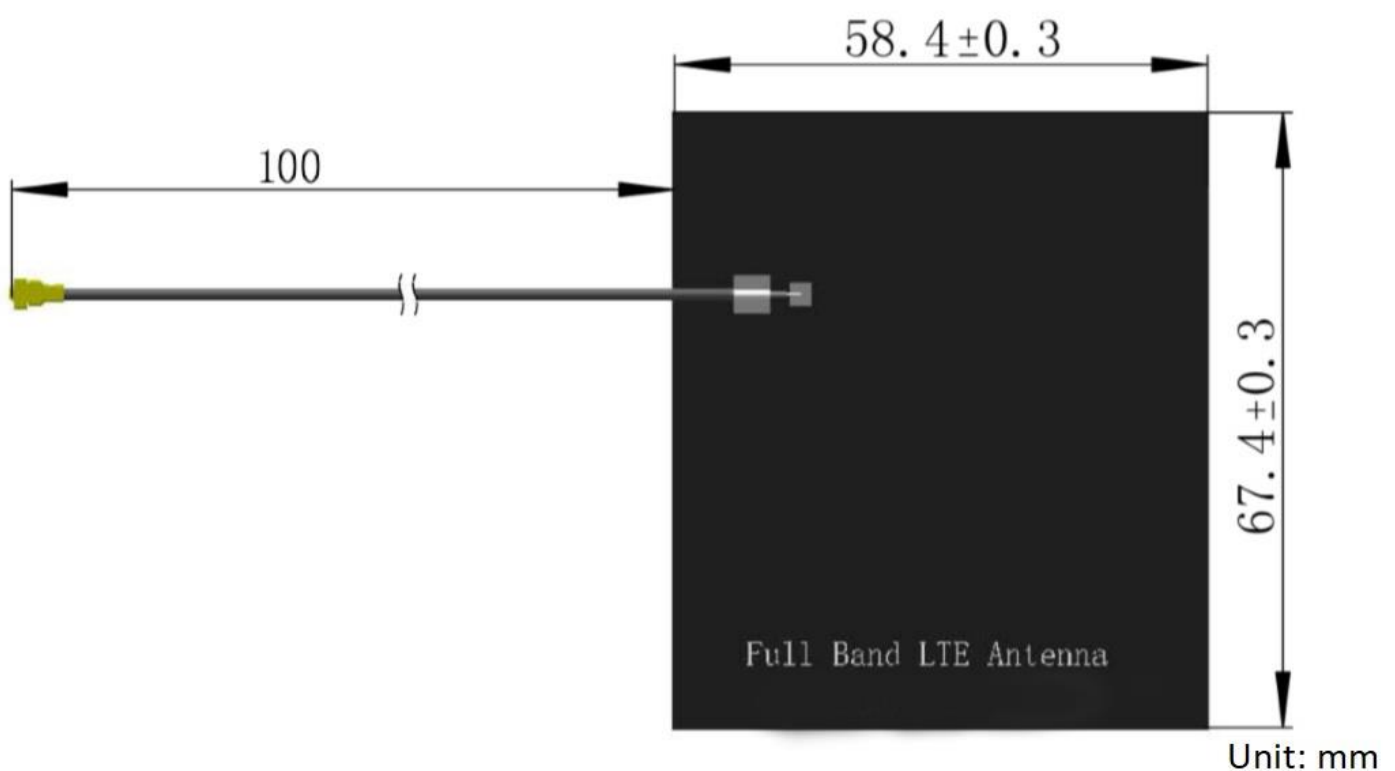

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 021