



LTE ANTENNA

Antenna LTE Magnet Mount 90,
5-9 dBi, SMA(m), RG58/3m

AO-ALTE-MG9S-58

SECTRON company offers a wide portfolio of 868 antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.

BENEFITS

- Low VSWR
- Gain
- Easy installation




FEATURES


AO-ALTE-MG9S-58

Technology	LTE
Frequency bands	700/824/960/1710/1880/2170/2600/2700 MHz
Bandwidth	-
Gain	5-9 dBi
VSWR	<2.4:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	Attached graphs bellow
Polarization	Vertical
Maximum input power	10 W
Power voltage	-
Dimensions	∅ 81 x 444.3 mm
Weight	g
Operating temperature	-30 to +80 °C
Execution	External
Method of attachment	Magnet Mount
Cable type	RG58/U
The cable length	3 m
Connector type	SMA(m)
Certification	RoHS


DRAWING

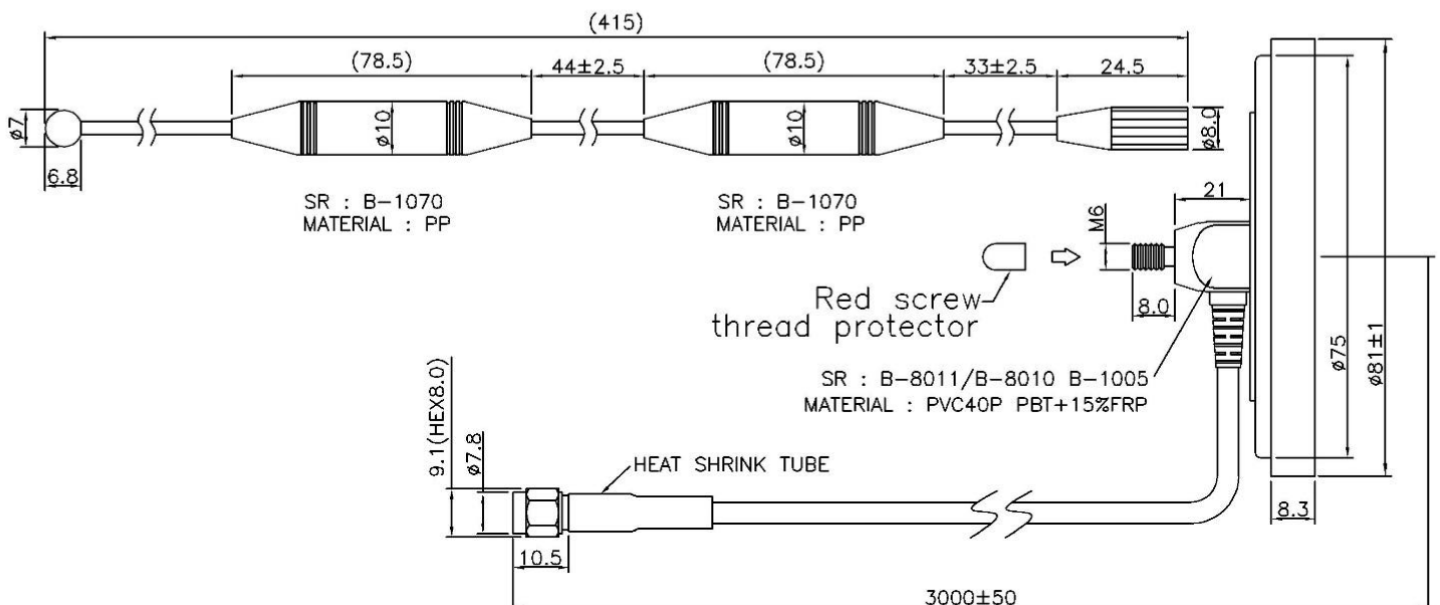

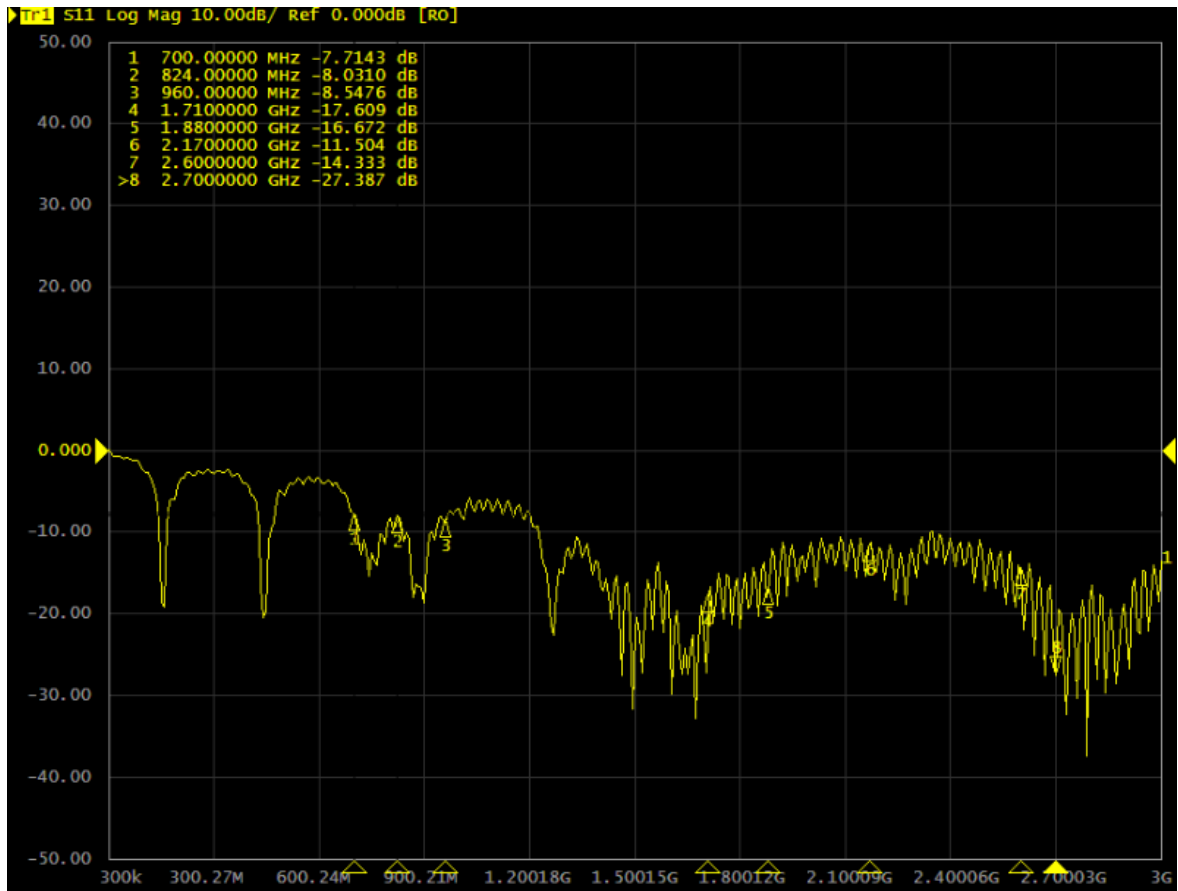



S_{11} - Return Loss [dB]

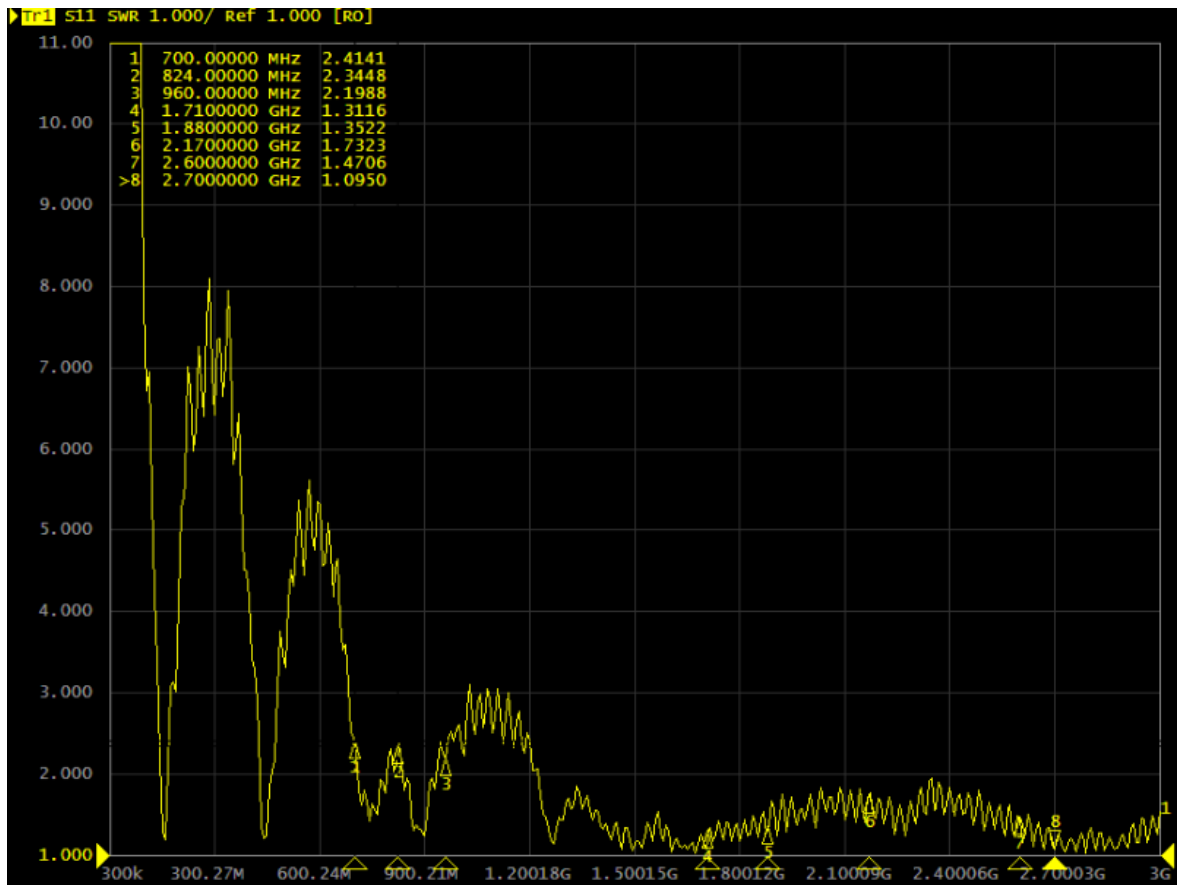


VSWR – Voltage standing wave ratio [-]



2D RADIATION PATTERN

Freq. / Chan.	Color
700MHz	
824MHz	
960MHz	
1.71GHz	
1.88GHz	
2.17GHz	
2.6GHz	
2.7GHz	

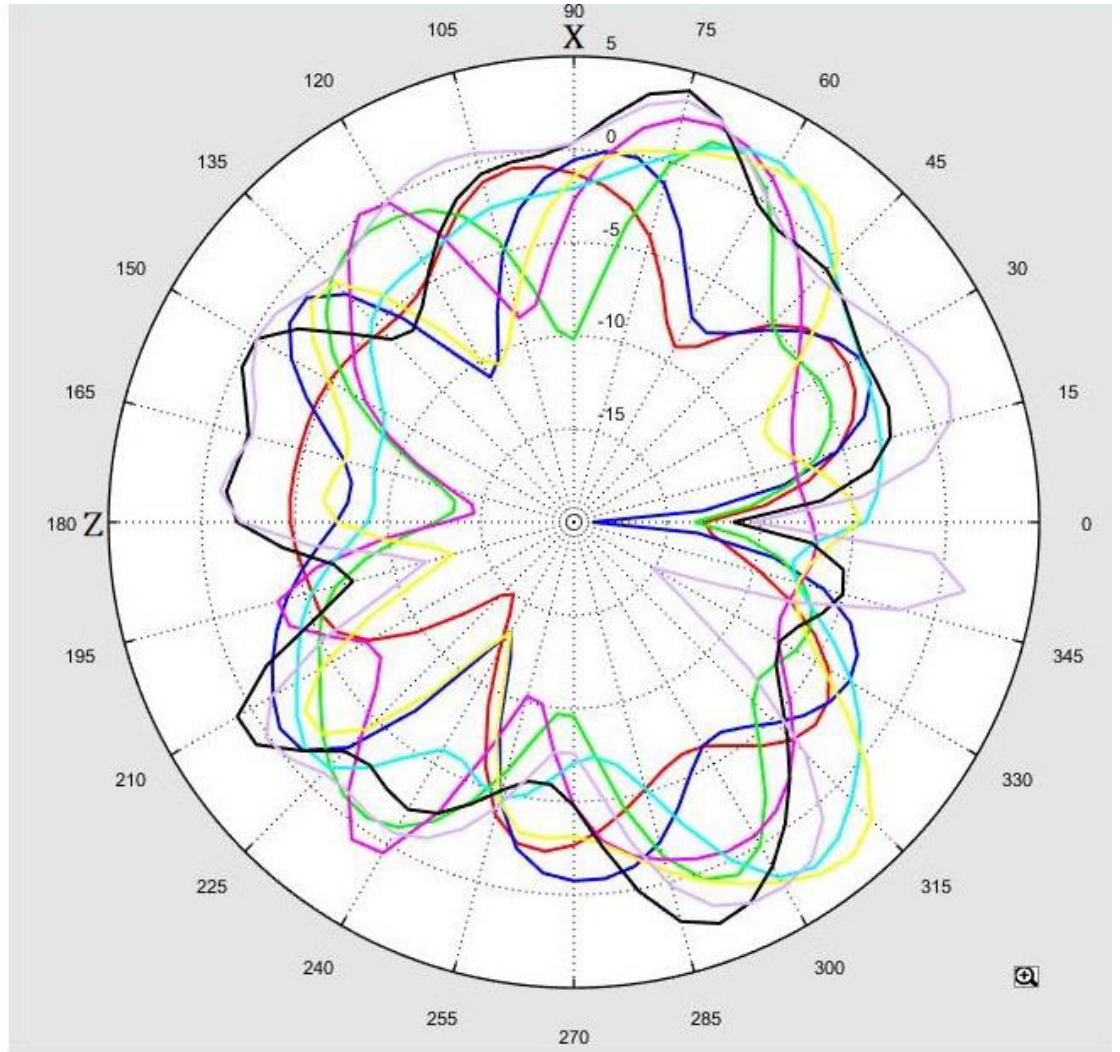

Frequency [MHz]	S_{11} [dB]	VSWR [-]	Gain [dBi]	Efficiency [%]
700	-7.71	2.41	-0.4	33.5
824	-8.03	2.34	0.33	43.95
960	-8.54	2.19	1.01	50.47
1710	-17.60	1.31	2.57	54.95
1880	-16.67	1.35	4.3	63.97
2170	-11.50	1.73	2.82	53.83
2600	-14.33	1.47	3.97	63.53
2700	-27.38	1.09	3.44	68.08

Different connector variants or cable lengths are available on request.

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 020