



GPS/GLONASS ANTENNA

Antenna GPS/GLONASS
Magnet Mount R34C,
SMA(m), RG174/3m

AP-AGNSS-34S

SECTRON company offers a wide portfolio of GPS/GLONASS antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.



BENEFITS


- Easy installation
- Low VSWR
- High LNA gain

FEATURES

AP-AGNSS-34S

Technology	GPS/GLONASS
Frequency bands	1575.42/1602 MHz
Bandwidth	-
Gain	1.56/1.8 dBi
LNA gain	28.5/28.2 dB
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Directional
Beam angle	H 40° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	3.0 V
Dimensions	52.4 x 27 mm
Weight	70.35 g
Operating temperature	-30 to +90 °C
Execution	External
Method of attachment	Magnet Mount
Cable type	RG174/U
The cable length	3 m
Connector type	SMA(m)
Certification	ISO 9001, ISO14001

DRAWING

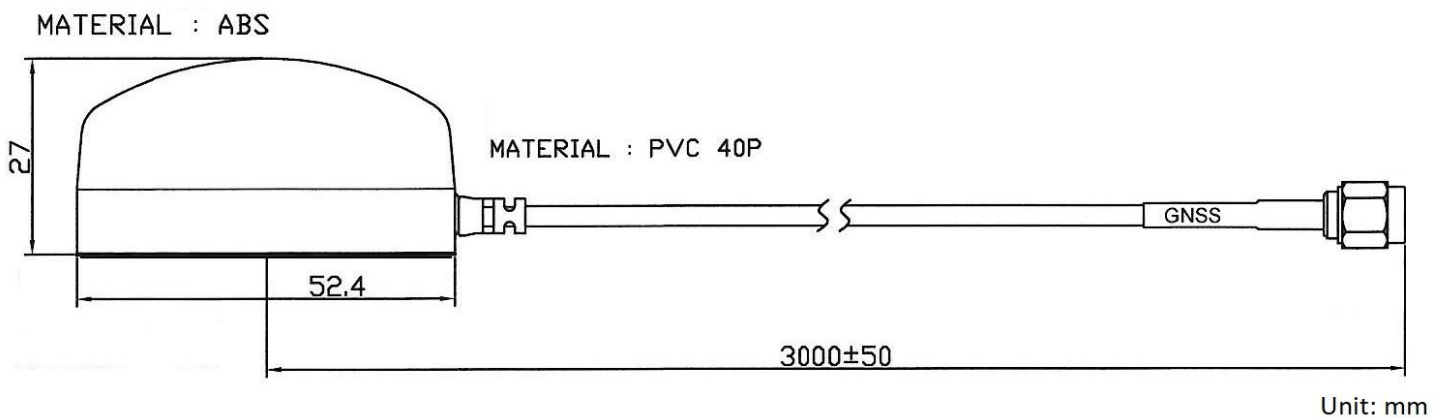

Different connector variants or cable lengths are available on request.