



GPS/GLONASS ANTENNA

Antenna GPS/GLONASS Mount R36, PUK, RG174/3 m, SMA (m)

AP-AGNSS-36S

SECTRON company offers a wide portfolio of GPS/GLONASS antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.




BENEFITS

- Environmental resistance
- Easy installation

Technology	GPS/GLONASS
Frequency bands	1575.42/1602 MHz
Bandwidth	10 MHz
Gain	0 dBi
LNA Gain	30 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	R.H.C.P.
Maximum input power	10 W
Power voltage	-
Dimensions	Ø54.4 x 28.7 mm
Weight	120 g
Operating temperature	-30 to +80 °C
Execution	External
Method of attachment	Screw Mount
Cable type	RG174/U
The cable length	3 m
Connector type	SMA (m)
IP Code	IP67
Certification	ISO 9001/ISO 14001

DRAWING

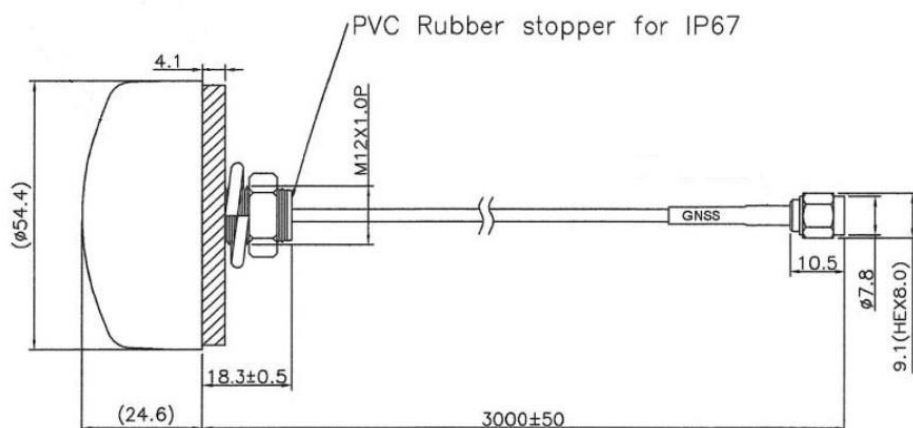

Unit: mm

Different connector variants or cable lengths are available on request.