




Bluetooth® AT Data Module

BTM410/411

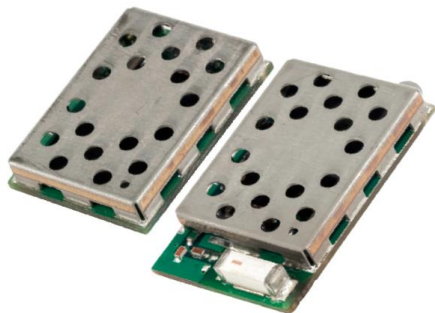

The BTM410 and BTM411 Bluetooth® modules from Laird have been designed to meet the needs of developers who wish to add robust, short range Bluetooth data connectivity to their products. They are based on the market leading Cambridge Silicon Radio BC04 chipset, providing exceptionally low power consumption with outstanding range. They support the latest Bluetooth Version 2.1 Specification, providing the important advantage of Secure Simple Pairing, which improves security and enhances the ease of use for end customers.

With a footprint as small as 12.5 mm x 18.0 mm for the BTM410 and best of class, low-power operation, these modules are the ideal choice for applications where designers need both performance and minimum size. For maximum flexibility in systems integration, the modules are designed to support a separate power supply for I/O.

To aid product development and integration, Laird has integrated a complete Bluetooth protocol stack within the modules, including support for the Bluetooth Serial Port Profile. The modules are fully qualified as Bluetooth End Products, allowing designers to integrate them within their own products with no further Bluetooth Qualification.

A comprehensive AT command interface is included, which simplifies firmware integration. Combined with a low cost developer's kit, this ensures that choosing Laird Bluetooth modules guarantees the fastest route to market.

Features and Benefits

- Bluetooth v2.1+EDR
- Adaptive frequency hopping to cope with interference from other wireless devices
- Secure Simple Pairing support
- External or internal antenna options
- Comprehensive AT interface for simple programming
- Bluetooth End Product Qualified
- Compact size
- Class 2 output – 4 dBm
- Low power operation
- UART interface
- PCM and SCO for external codec
- GPIO lines under AT control
- Wi-Fi co-existence

Application Areas

- Embedded devices
- Phone accessories
- Security devices
- Medical and telehealth devices
- Aftermarket automotive applications
- Bluetooth advertising
- ePOS

global solutions: local support..

USA: +1.800.492.2320
Europe: +44.1628.858.940
Asia: +852.2268.6567

wirelessinfo@lairdtech.com
www.lairdtech.com/wireless



Bluetooth® AT Data Module

BTM410/411

| CATEGORIES | FEATURE | IMPLEMENTATION |
|-----------------------------|-------------------------|---|
| Wireless Specification | Bluetooth® | Version 2.1+EDR |
| | Frequency | 2.402 – 2.480 GHz |
| | Max Transmit Power | Class 2 +4 dBm (at antenna pad – BTM410) +4 dBm (from integrated antenna – BTM411) |
| | Receive Sensitivity | Better than -84 dBm |
| | Range | Up to 30 meters |
| | Data Rates | Up to 2.1 Mbps (over the air) |
| | UART Data Transfer Rate | Greater than 300 Kbps |
| Host Interface | UART | Supports CTS, RTS, DRT, DSR, DCD and RI |
| User Interface | GPIO | 8 lines (shared) |
| Profiles | | SPP – Serial Port Profile Voice over SCO via a PCM interface |
| Supply Voltage | Supply | 3.0 V to +3.3 V |
| | I/O | 1.7 V to +3.6 V (independent of VCC) |
| Power Consumption | Current Consumption | Less than 40 mA during SCO transmission Idle (sleep) < 1 mA |
| Coexistence / Compatibility | 802.11 (Wi-Fi) | 2 wire and 3 wire schemes supported |
| Connections | External Antenna | Connection via SMT pad – BTM410 |
| | Internal Antenna | Multilayer ceramic – BTM411 |
| Protocols | | AT Command Set |
| Physical | Dimensions | 12.5 mm x 18.0 mm x 3.4 mm (external antenna – BTM410) 12.5 mm x 22.0mm x 3.4 mm (integrated antenna – BTM411) |
| Environmental | Operating Temperature | -40° C to +85° C |
| | Storage Temperature | -40° C to +85° C |
| Miscellaneous | Lead Free | Lead-free and RoHS compliant |
| | Warranty | 5-Year Limited Lifetime |
| Developmental Tools | Development Kit | Development board and software tools |
| Approvals | Bluetooth | End Product Approved |
| | FCC/IC & CE | BTM410 – Limited Modular Approval BTM411 – Full Modular Approval |

Ordering Information

| | |
|------------|--|
| BTM410 | Bluetooth AT Data Module (external antenna) |
| BTM411 | Bluetooth AT Data Module (with integrated antenna) |
| DVK-BTM410 | Development Kit (external antenna) |
| DVK-BTM411 | Development Kit (with integrated antenna) |

The details contained within the document are subject to change. Download the product specification from www.lairdtech.com/wireless for the most current specification.

LWS-DS-BTM410-411 0313

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2013 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.