



GSM/UMTS/LTE ANTENNA

Antenna LTE Flexible 20x80 mm,
Cable OD 1.37 mm, L=133 mm,
SMA(m) Cable

AO-ALTE-FPC002SK133

SECTRON company offers a wide portfolio of GSM/UMTS/LTE antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.



BENEFITS


- Easy installation
- Low VSWR
- Flexible

FEATURES

AO-ALTE-FPC002SK133

Technology	GSM/UMTS/LTE
Frequency bands	700/800/900/1700/1800/1900/2100/2600 MHz
Bandwidth	-
Gain	0 dBi
VSWR	<2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 30°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	20 x 80 x 0.1 mm
Weight	2.62 g
Operating temperature	-20 to +80 °C
Execution	Internal
Method of attachment	Adhesive
Cable type	Hirose 088
The cable length	0.133 m
Connector type	SMA (m)

DRAWING

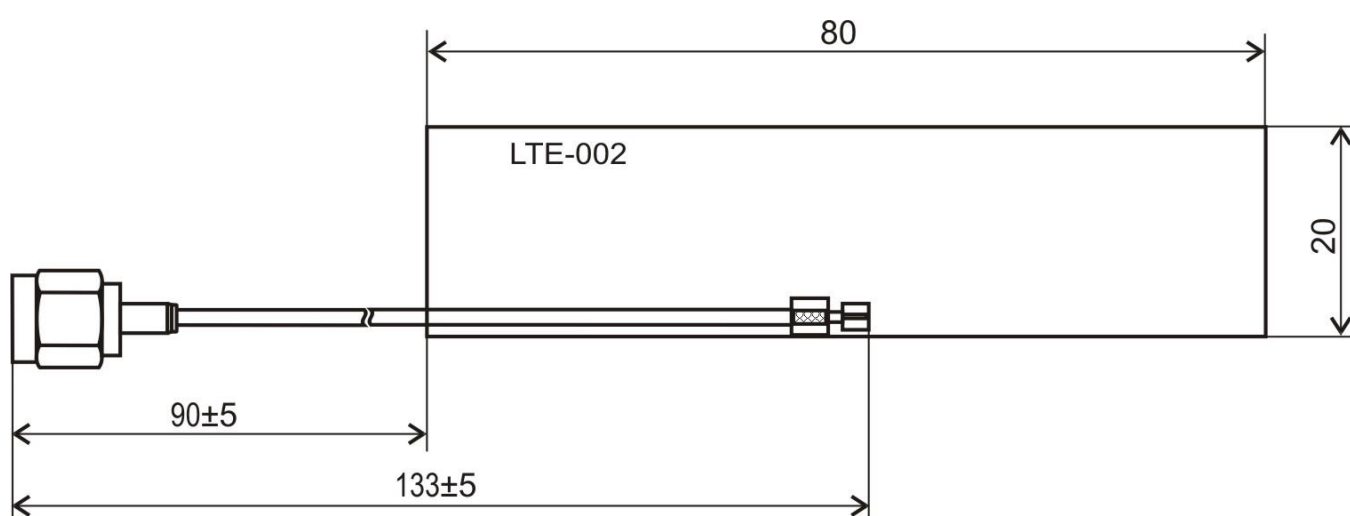

UNIT: mm

Different connector variants or cable lengths are available on request.