

ISM ANTENNA

Antenna 868 MHz Magnet Mount, 3 dBi, SMA(m) RA, RG174U, 1.5 m

AO-A868-MG3SRA1

SECTRON company offers a wide portfolio of ISM antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.


BENEFITS

- Easy installation
- Magnetic mount
- High gain
- RoHS compliant

FEATURES AO-A868-MG3SRA1

Technology	ISM
Frequency bands	868 MHz
Bandwidth	≤ 20 MHz
Gain	3 dBi
VSWR	2.0:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	Attached graphs below
Polarization	Vertical
Maximum input power	-
Power voltage	-
Dimensions	Ø 30 x 230 mm
Weight	-
Operating Temperature	-30 to +90 °C
Execution	External
Method of attachment	Magnet Mount
Cable type	RG174/U
The cable length	1.5 m
Connector type	SMA(m) RA
Certification	RoHS, ISO 9001/14001


DRAWING

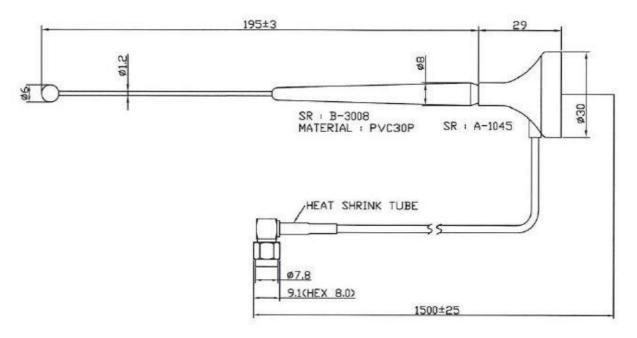


Units:mm

MEASURED GRAFS AO-A868-MG3SRA1

S11 - RETURN LOSS [dB]

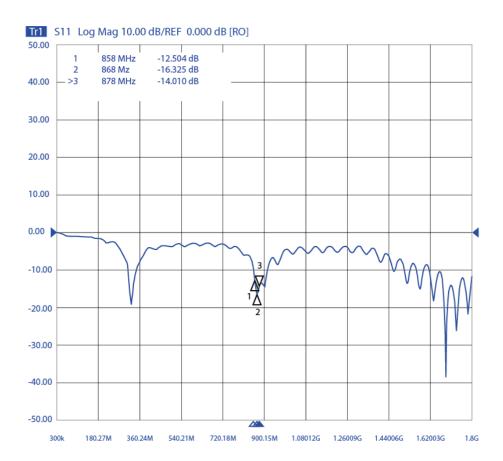


S11 - VSWR [-]

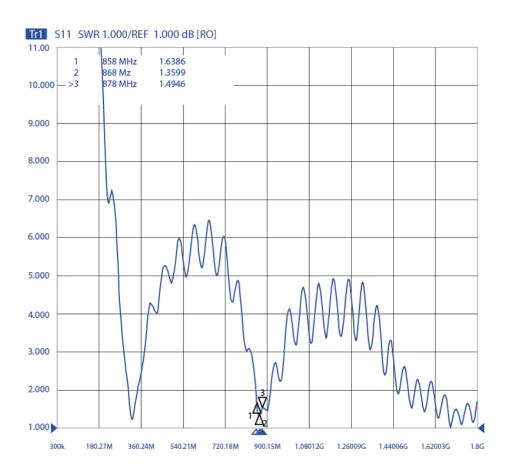

SIMULATED GRAFS AO-A868-MG3SRA1

RADIATION PATTERN

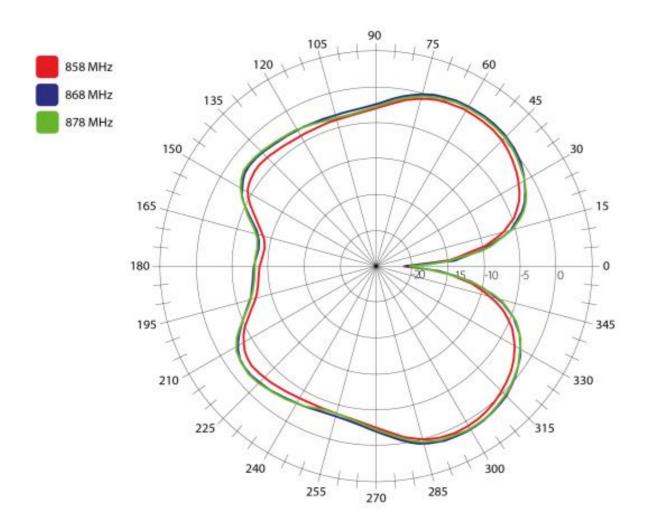

ALL VARIANTS

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12 709 00 Ostrava 9, Czech Republic WWW.SECTRON.CZ Tel.: +420 556 621 020