



ISM ANTENNA

Antenna 915 MHz Stick 90°/180°
G410, 3 dBi, SMA(m), black

AO-A915-G410S

SECTRON company offers a wide portfolio of ISM antennas with various versions differing in shape, level of gain and manner of attachment. SECTRON guarantees a compatible connection between an antenna and all antenna adaptors produced by SECTRON.

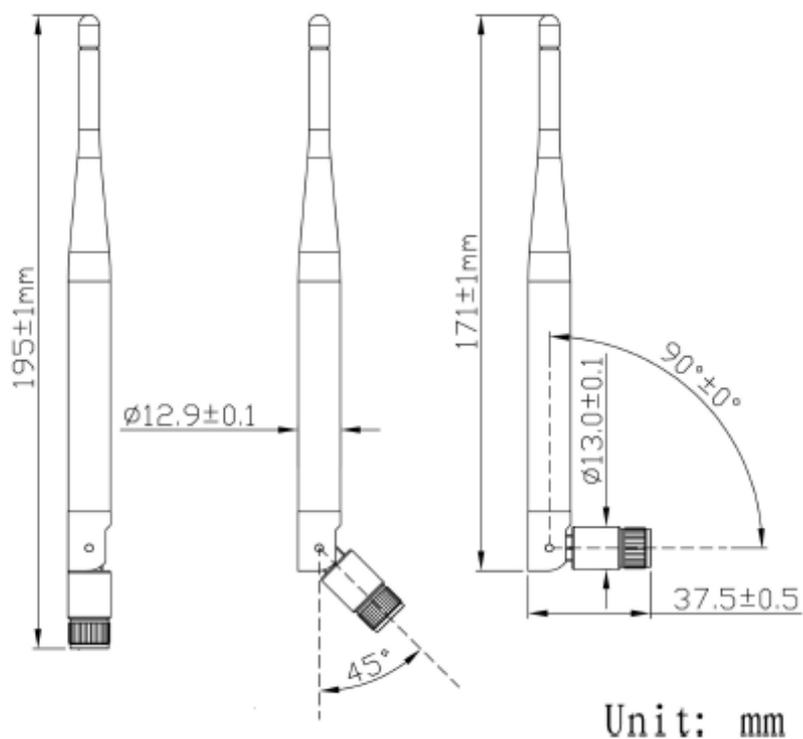


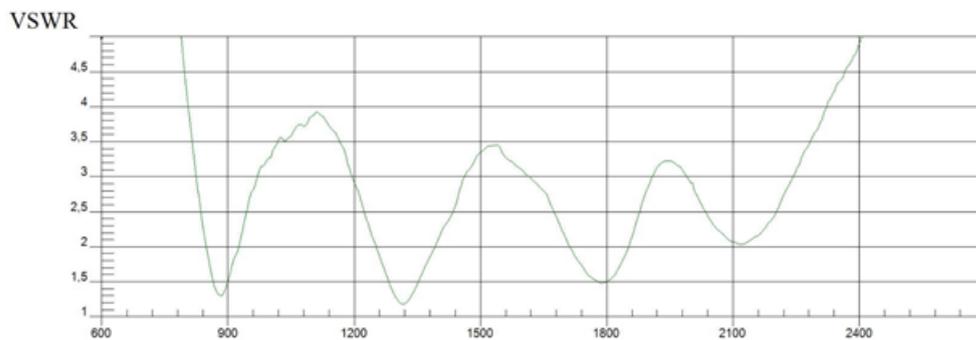
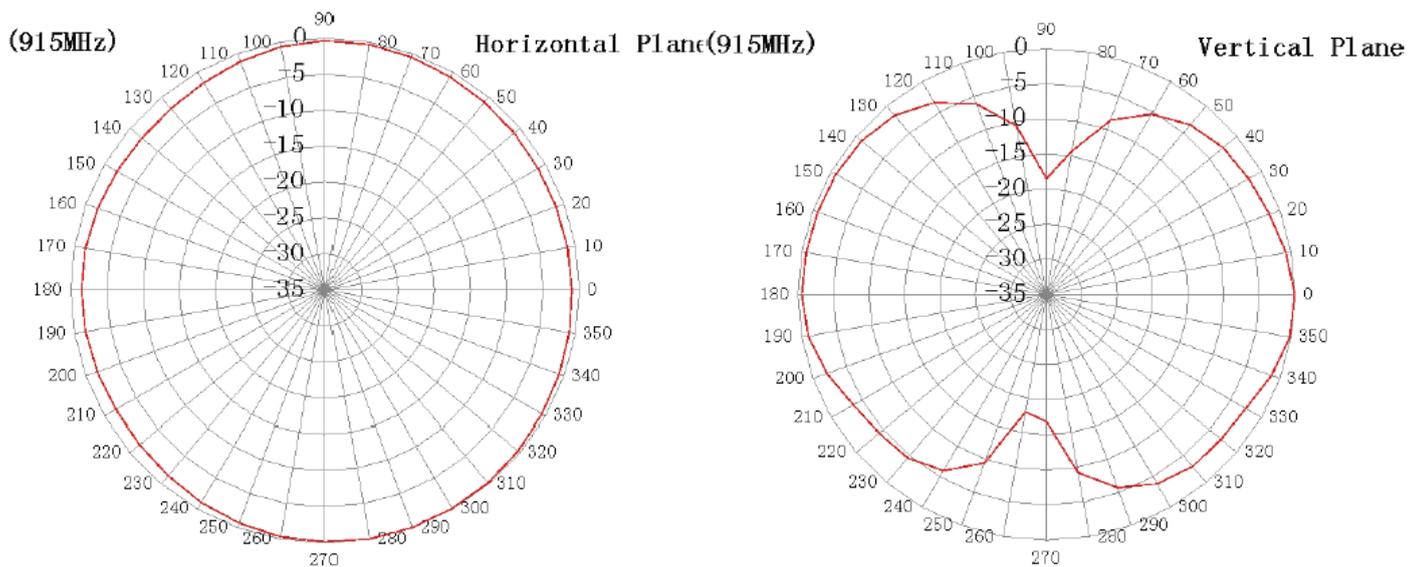
BENEFITS

- No cable required
- Compact design
- Low VSWR

Technology	ISM
Frequency bands	915 MHz
Bandwidth	CF ± 8 MHz
Gain	3 dBi
VSWR	<2:1
Impedance	50 Ohm
Directivity	Omnidirectional
Beam angle	H 360° V 75°
Polarization	Linear
Maximum input power	10 W
Power voltage	-
Dimensions	90°: 171 x 37.5 mm; 180°: \varnothing 12.9 x 195 mm
Weight	± 26 g
Operating temperature	-40 to +85 °C
Execution	External
Method of attachment	Screw mount
Cable type	-
The cable length	-
Connector type	SMA(m)
Certification	RoHS

DRAWING



VSWR – VOLTAGE STANDING WAVE RATIO [-]**2D - RADIATION PATTERN H/V****VARIANTS**

Different connector variants or cable lengths are available on request.

CONTACTS

SECTRON s.r.o. Josefa Šavla 1271/12
709 00 Ostrava 9, Czech Republic

WWW.SECTRON.CZ
Tel.: +420 556 621 021